





FREEslim flap FREEslim flap pto

116524

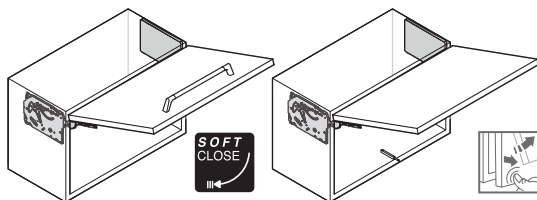

<https://www.kesseboehmer.com>

4069680000

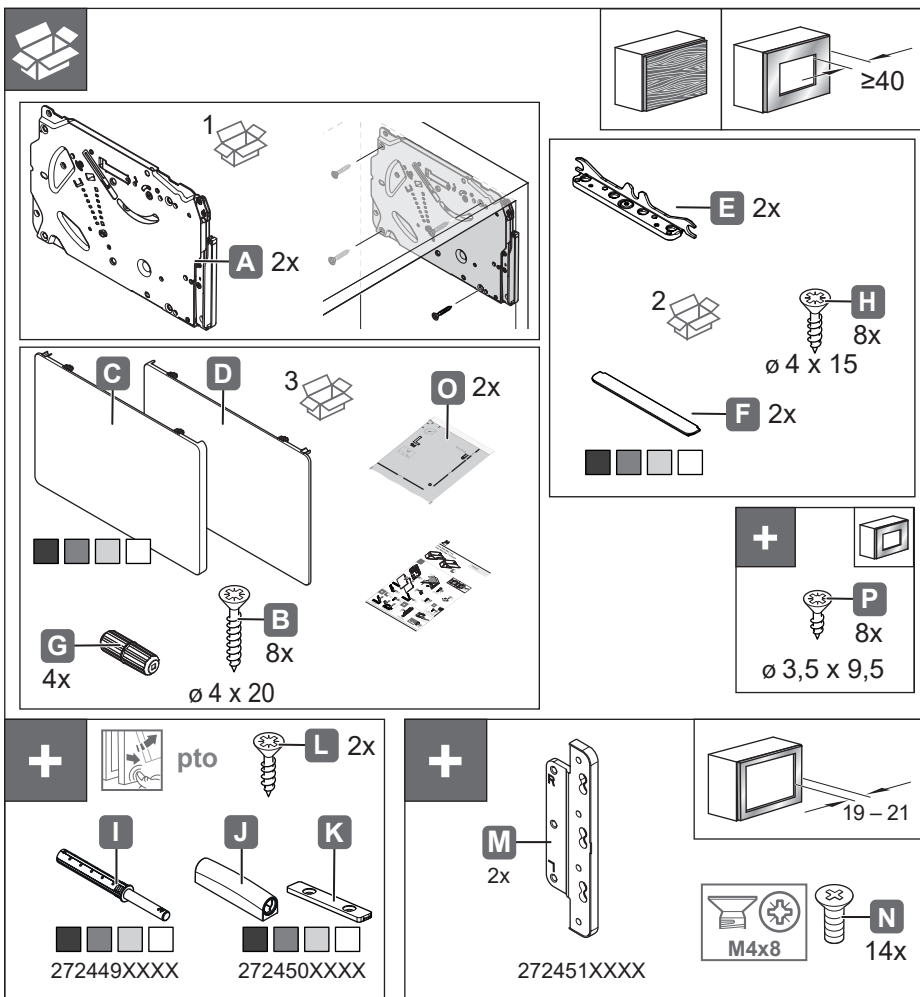


[WS238]


10.10.2025

i





„mm“




Article No: 2724390006
Check Date: 02/09/25
Model: soft close
Spring: 2x3 mm



PF* = KH x	FREEslim flap soft close	FREEslim flap pto	pto-Stößel
	2724390006	2724420006	2724490006
* Power Factor	PF 480 - 4800	PF 480 - 4080	
KH 			 Type 3 - strong (17.5 - 36.8 N)
225	2.1 - 21.3	2.1 - 18.1	
250	1.9 - 19.2	1.9 - 16.3	
275	1.7 - 17.5	1.7 - 14.8	
300	1.6 - 16.0	1.6 - 13.6	
325	1.5 - 14.8	1.5 - 12.6	
350	1.4 - 13.7	1.4 - 11.7	
375	1.3 - 12.8	1.3 - 10.9	
400	1.2 - 12.0	1.2 - 10.2	
425	1.1 - 11.3	1.1 - 9.6	
450	1.1 - 10.7	1.1 - 9.1	
475	1.0 - 10.1	1.0 - 8.6	
500	1.0 - 9.6	1.0 - 8.2	
525	0.9 - 9.1	0.9 - 7.8	
550	0.9 - 8.7	0.9 - 7.4	
575	0.8 - 8.3	0.8 - 7.1	
600	0.8 - 8.0	0.8 - 6.8	
625	0.8 - 7.7	0.8 - 6.5	
650	0.7 - 7.4	0.7 - 6.3	



KO	Y	X
16 (19)	16	61 (71)
	18	54 (64)
	19	51 (61)
	22	41 (51)
	24	34 (44)
	26	27 (37)
	28	20 (30)



116524

4069680000




[WS238]

10.10.2025

1





i




i



2x
Ø 5 x 10



2

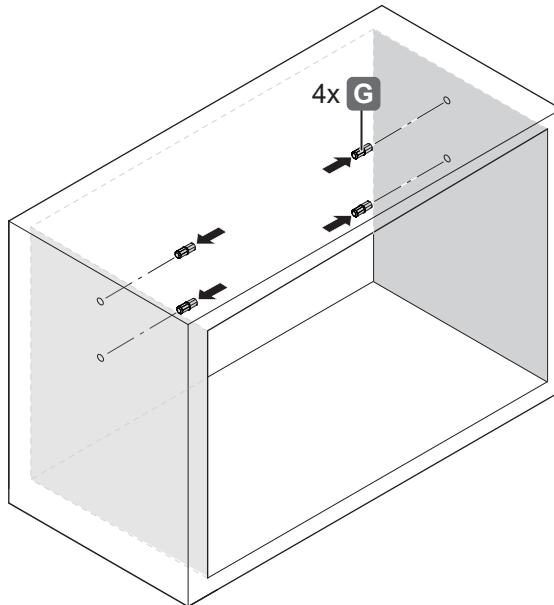


116524

4069680000


[WS238]

10.10.2025

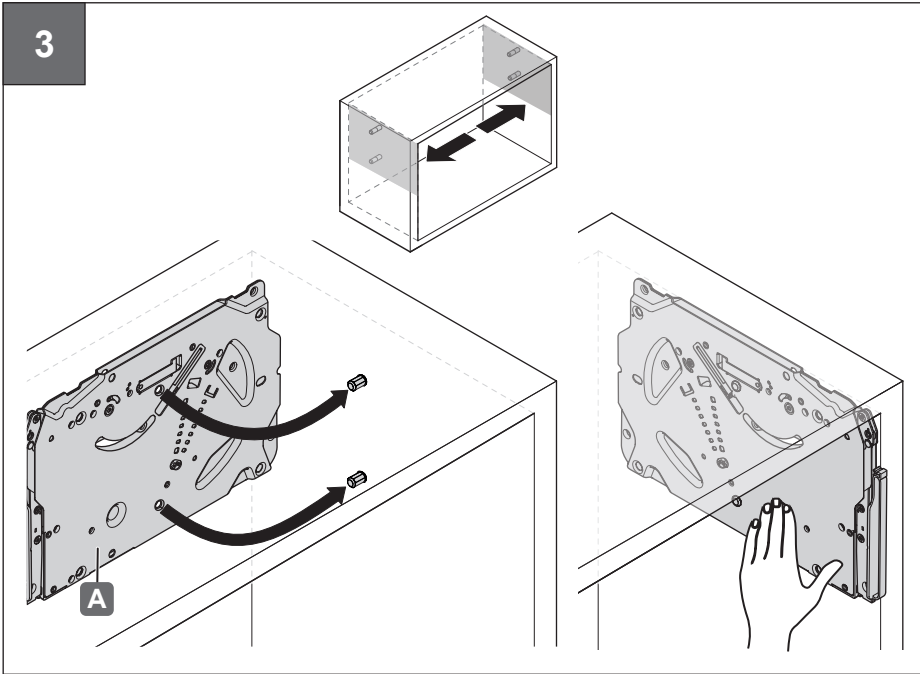

116524


4069680000

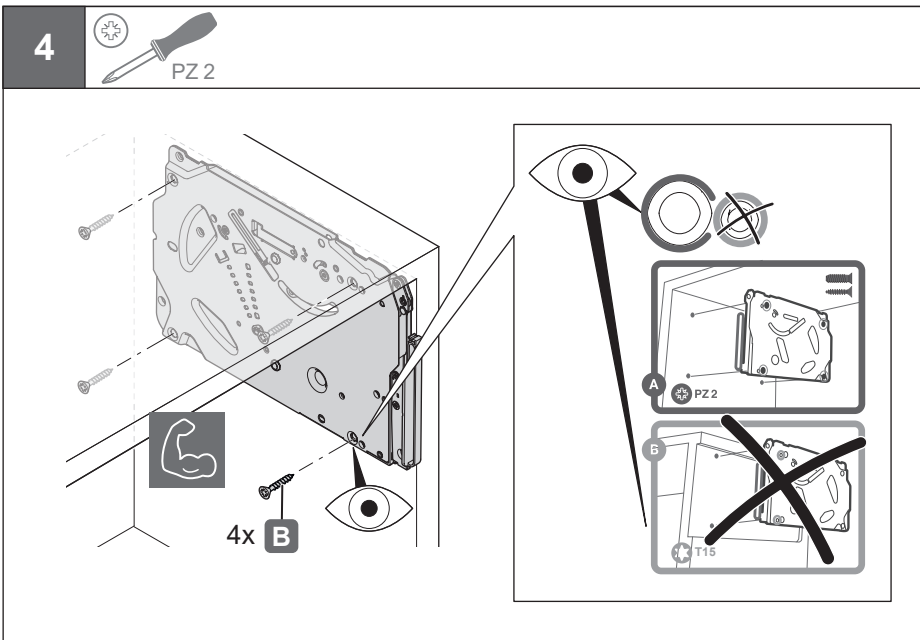


[WS238]

10.10.2025


5




MIN. FORCE





1

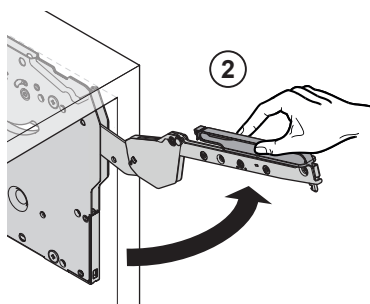




2

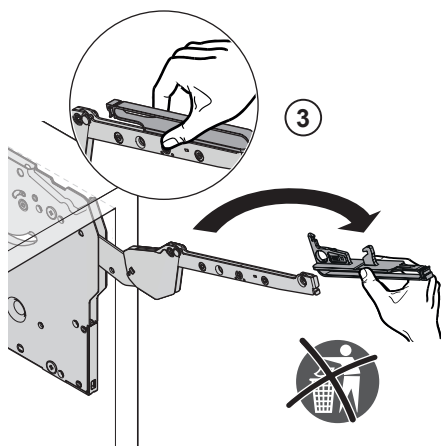

3



4



116524

4069680000

[WS238]

10.10.2025

6






Ø 10 mm




PZ 2




push

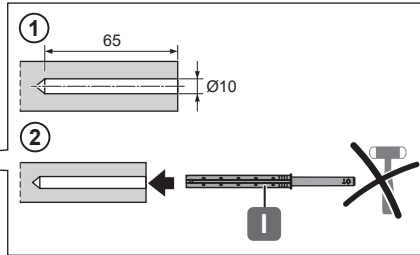


①

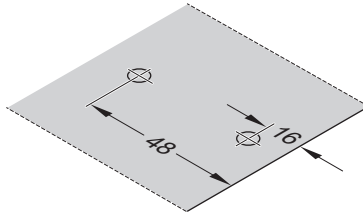


②



③



④







116524

4069680000





[WS238]

10.10.2025

7a

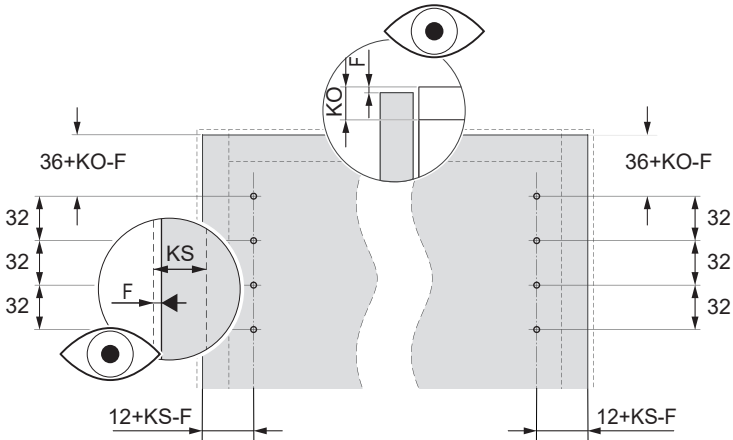

8a

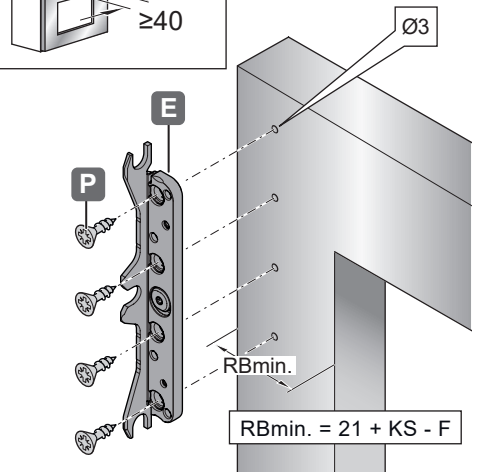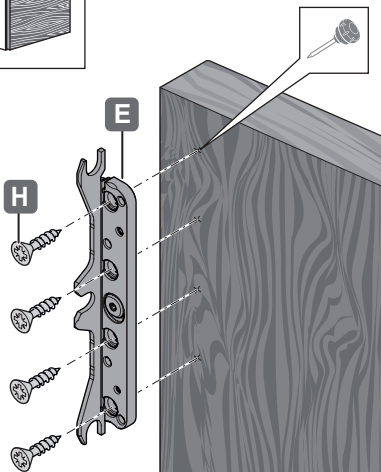


116524

4069680000


[WS238]

10.10.2025

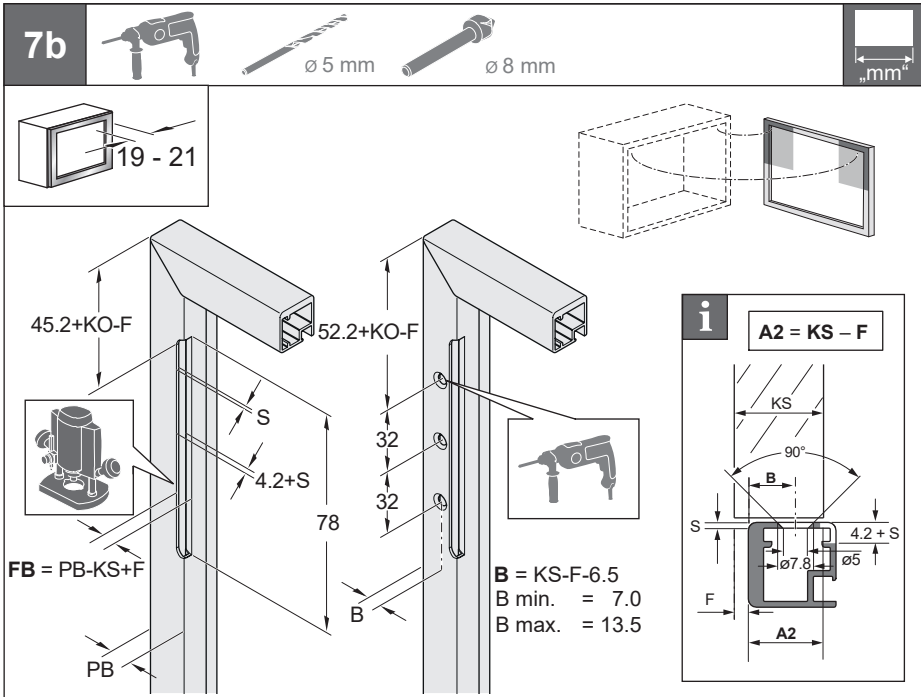

116524


4069680000

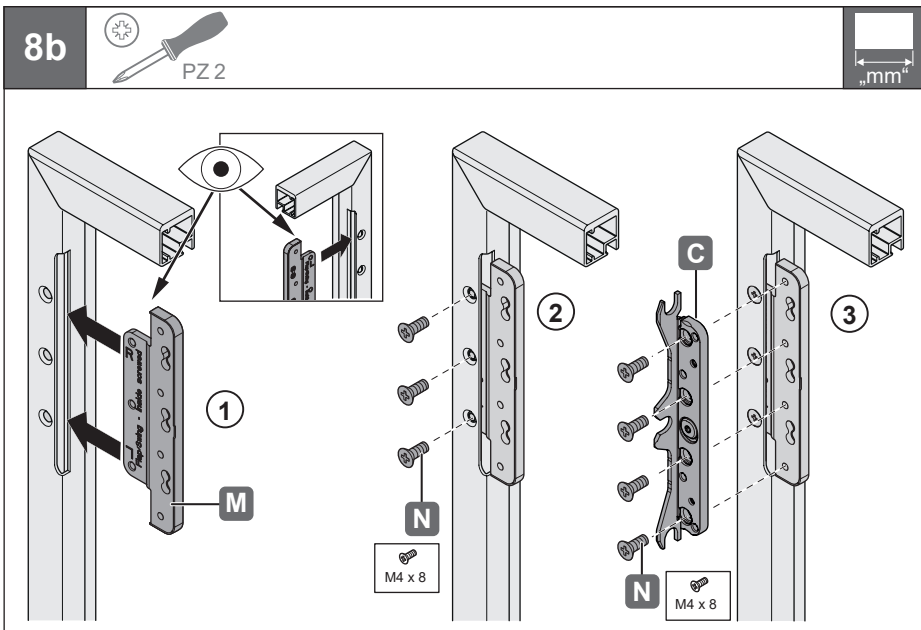

[WS238]

10.10.2025






9

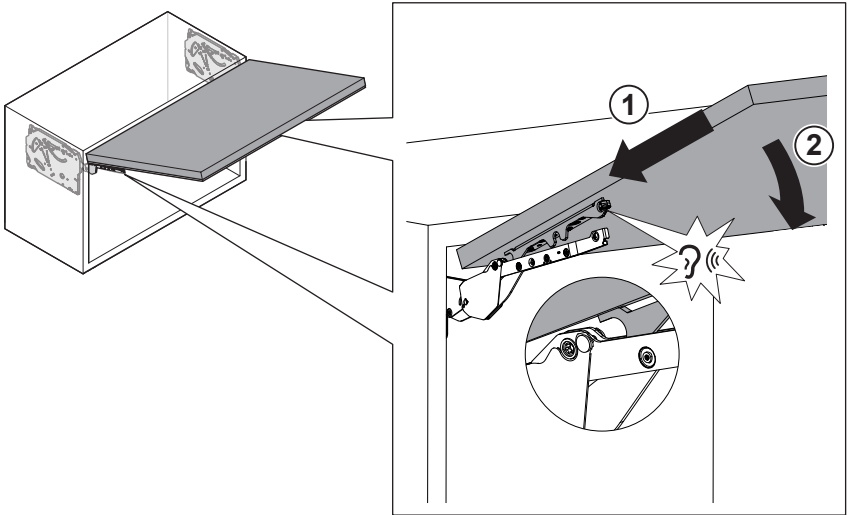

116524

4069680000



10

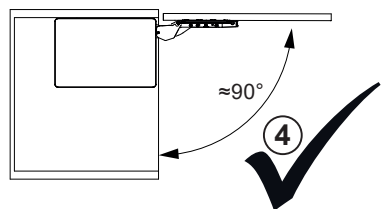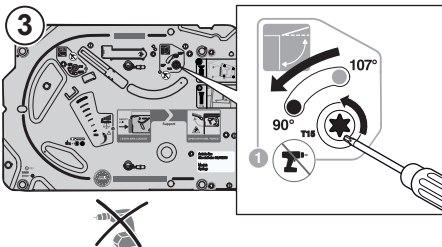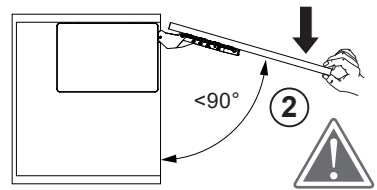

[WS238]

10.10.2025


11

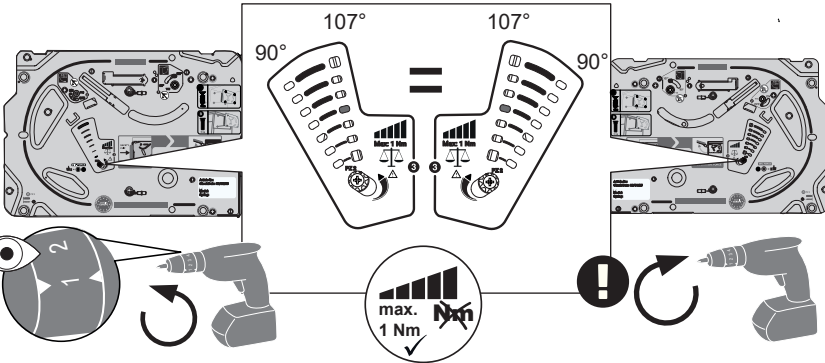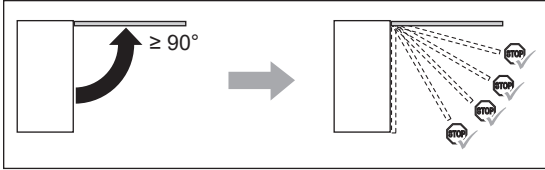

116524

4069680000



12



L + R
PF ≥ 2.500 ON + ON




L / R
PF < 2.500 ON + OFF



i



push





[WS238]

10.10.2025

13



push

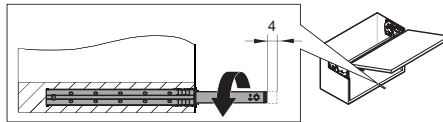

116524

4069680000

[WS238]







10.10.2025

116524

4069680000

[WS238]



10.10.2025

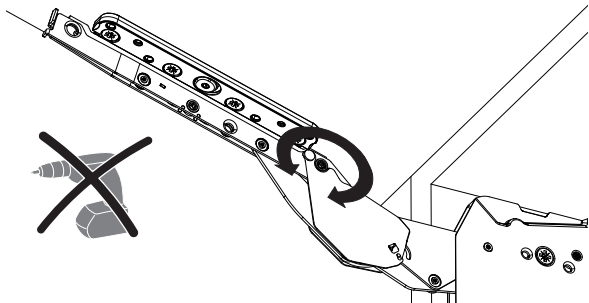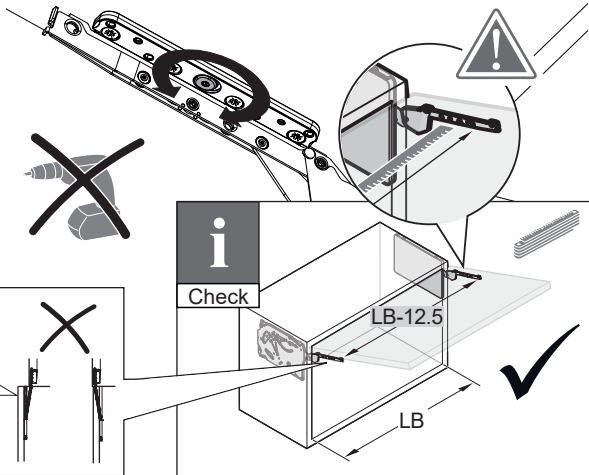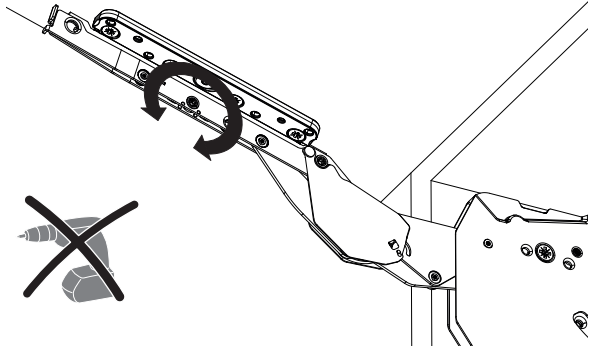

15

116524



4069680000

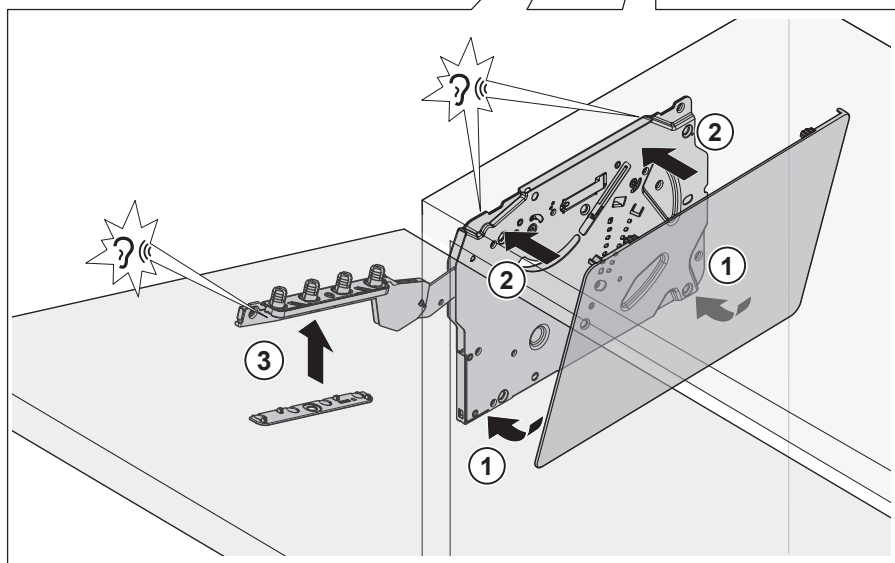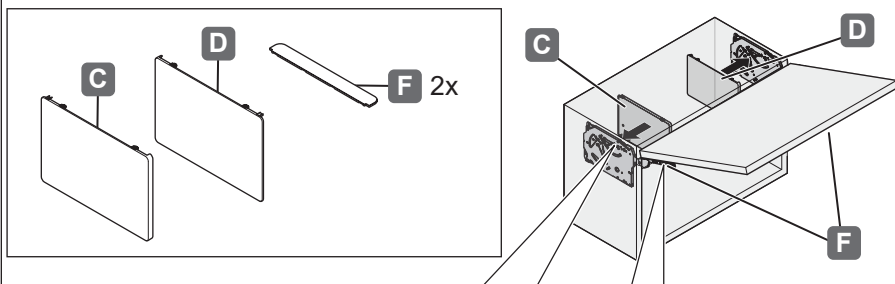

PZ 2

[WS238]


①



10.10.2025




2

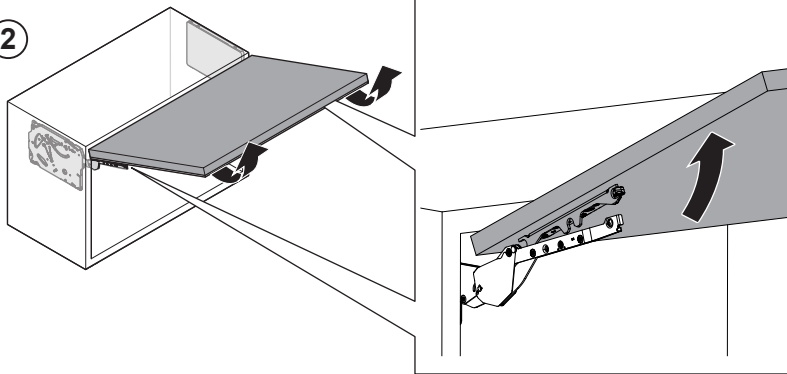


116524

4069680000

3

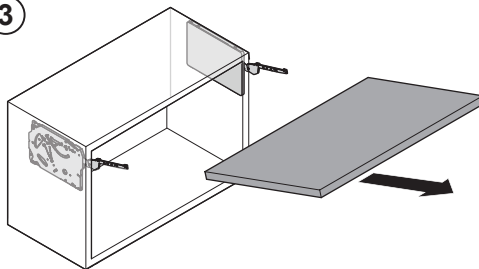


4



[WS238]

10.10.2025

5

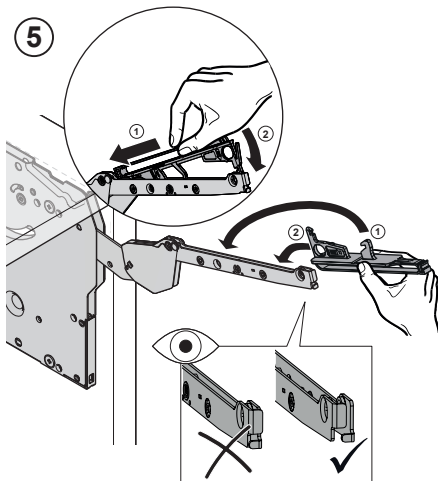

6

